MONO + CCT | IP 20 | Warranty: 2 years | app control

MiBoxer controller

E2-RF

The Miboxer E2-RF controller is a device designed for wireless LED lighting control. It uses 2.4 GHz technology, which provides low power consumption, high resistance to interference, and enables the creation of self-organizing networks. Thanks to its ability to connect remotely with other devices, the E2-RF offers convenience and flexibility in use. Compatible with 2.4G RF remotes, it is a reliable solution for efficient lighting management in various applications.

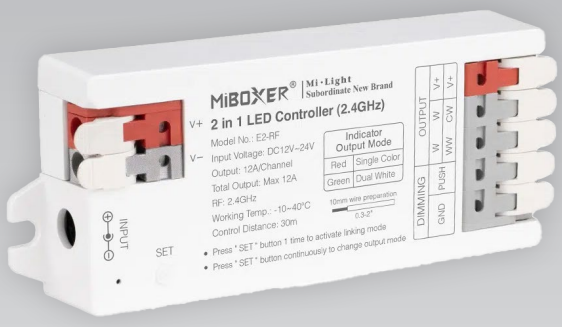

download the full manual

Technical specifications

Model	Product code	Color	Voltage	Power	Output current	IP	Control	Operating temperature
MIBOXER E2-RF	E2-RF	white	12-24 V AC	max. 144 W / 12 V DC max. 288 W / 24 V DC	2 x 12A (total max. 12A)	20	2.4 GHz	-10~40°C

Dimensions

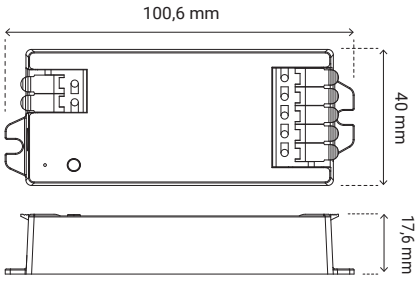

Compatible panels and remotes

B1 / B1-B

B2

K1 / K1-B

K2/ K2-B

FUT087
FUT087-B

C1

FUT007