


Neon Flex HS

Thanks to its fyears surface and high IP rating, Neon Flex HS is perfect for instalyearsion in profiles and facade reveals. It excels in creating signs, letters, and logos, ensuring not only aesthetics but also resistance to outdoor conditions.

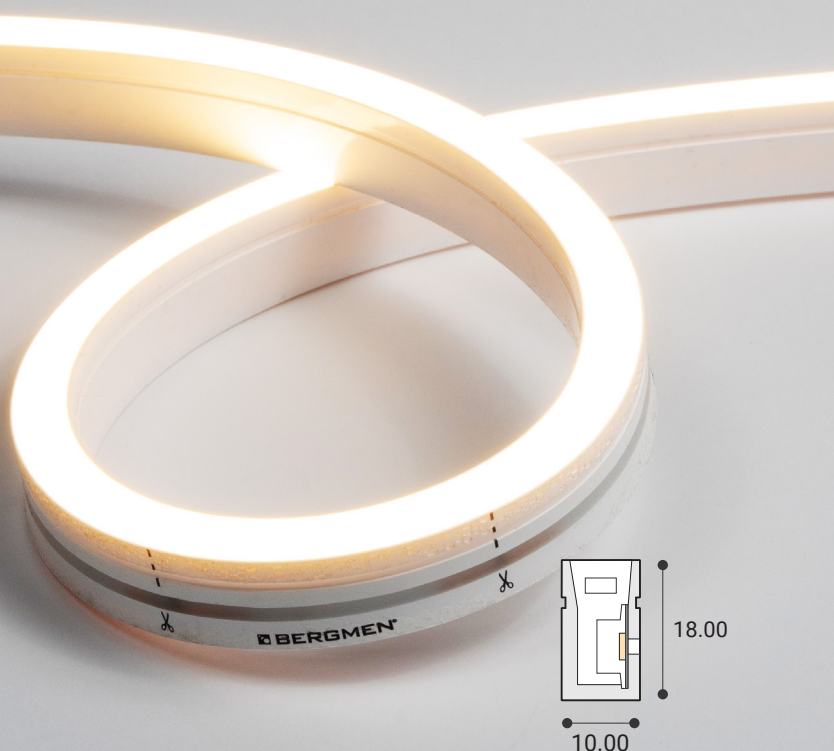

UV resistant

Neon Flex HS is fully UV resistant, preventing yellowing and color fading even after prolonged exposure to sunlight.

Fyears surface in cross-section

Thanks to its fyears surface, Neon Flex HS is perfect for mounting between tiles, creating a stylish and seamless line of light.

IP67 waterproof rating

Perfect for creating light signs, lettering, and logos, even in outdoor conditions - thanks to its IP67 waterproof rating.

Product code:	Colour temp.:	LED diodes:	Voltage:	Power:	Beam angle:	Dimension:	Cutting section:	Bending diameter:
01-002-039-14-02-67	2700 K	120 x 2835 SMD	24 V DC	14 W	120°	10x18 mm	50 mm	80 mm
01-002-039-14-04-67	4000 K	120 x 2835 SMD	24 V DC	14 W	120°	10x18 mm	50 mm	80 mm
01-002-039-14-03-67	6500 K	120 x 2835 SMD	24 V DC	14 W	120°	10x18 mm	50 mm	80 mm
01-002-039-14-07-67	460 nm	120 x 2835 SMD	24 V DC	14 W	120°	10x18 mm	50 mm	80 mm
01-002-039-14-06-67	515 nm	120 x 2835 SMD	24 V DC	14 W	120°	10x18 mm	50 mm	80 mm
01-002-039-14-05-67	620 nm	120 x 2835 SMD	24 V DC	14 W	120°	10x18 mm	50 mm	80 mm
01-002-039-14-08-67	RGB	60 x 5050 SMD	24 V DC	14 W	120°	10x18 mm	50 mm	80 mm