



LED module

RX-2E Stark

The RX-2E Stark is a cost-effective LED module featuring two high-performance LEDs for excellent light output. Developed for illuminating signs and advertising forms from 40 mm in depth, it offers reliable performance at an attractive price.

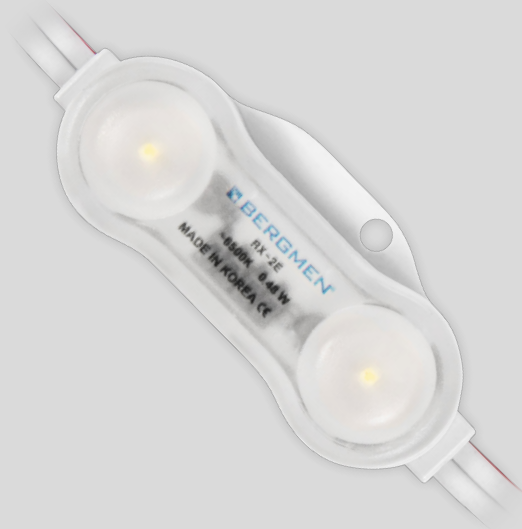

Scale 1:2

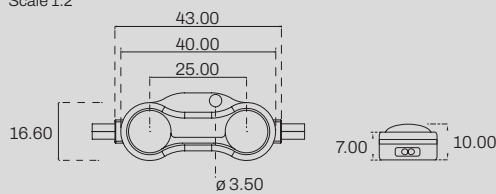

High-efficiency LEDs

Guarantees bright and even illumination, meeting the requirements of even the most demanding advertising projects.

Economical solution

The combination of high quality components and a competitive price makes the RX-2E Stark the ideal choice for budget lighting projects.

IP68 waterproof

Protection against moisture, dust and changing weather conditions makes the module suitable for both indoor and outdoor applications.

Technical specifications

Packing: 200 (4 x 50)

| Model | Product code | LED type | Voltage | Power | CRI | Colour temp. | Beam angle | Luminous flux | Module spacing | Max pcs/chain |
|-------------|--------------------|----------------------------------|---------|--------|-----|--------------|------------|---------------|----------------|---------------|
| RX-2E Stark | 01-001-044-01-04 | 2 x 2835 SMD Itswell | 12 V DC | 0.48 W | 70 | 10000 K | 160° | 42 lm | 60 mm | ≤50 |
| RX-2E Stark | 01-001-044-01-04-A | 2 x 2835 SMD Seoul Semiconductor | 12 V DC | 0.48 W | 70 | 10000 K | 160° | 42 lm | 60 mm | ≤50 |
| RX-2E Stark | 01-001-044-03-04 | 2 x 2835 SMD Itswell | 12 V DC | 0.48 W | 70 | 6500 K | 160° | 42 lm | 60 mm | ≤50 |
| RX-2E Stark | 01-001-044-05-04 | 2 x 2835 SMD Itswell | 12 V DC | 0.48 W | - | 630 nm | 160° | 13 lm | 60 mm | ≤50 |
| RX-2E Stark | 01-001-044-06-04 | 2 x 2835 SMD Itswell | 12 V DC | 0.48 W | - | 523 nm | 160° | 31 lm | 60 mm | ≤50 |
| RX-2E Stark | 01-001-044-07-04 | 2 x 2835 SMD Itswell | 12 V DC | 0.48 W | - | 466 nm | 160° | 6 lm | 60 mm | ≤50 |